

Y500 / 187 / 1 Key Access





Opening the storage compartment

- Slide the cover down to reveal the dials.
- Turn the dials to the preset factory combination 0-0-0-0 and align the numbers with the guide line.
- Push the release button to open the door.


Securing the storage compartment

- Close the compartment door and hold closed.
- Scramble the combination dials to lock the door.
- Slide the cover up.

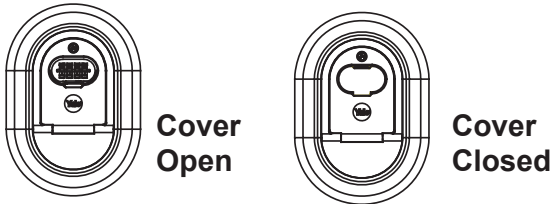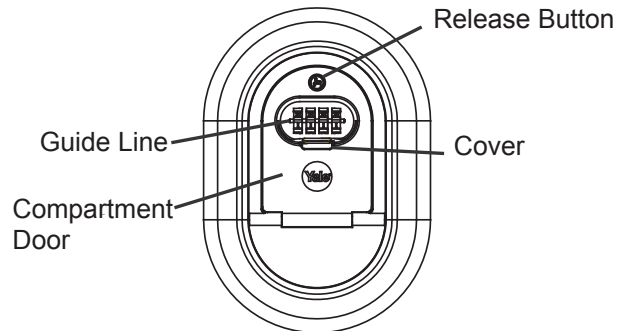

To set a new combination

- Open the compartment door.
- Push the reset lever left and down and keep it in this position.
- Turn the dials to set your own combination.
- Push the reset lever up and into the original position.
- Close the compartment door and hold closed.
- Scramble the combination dials to lock the door and conceal your combination.
- Close the Cover.
- Your new combination is now set.

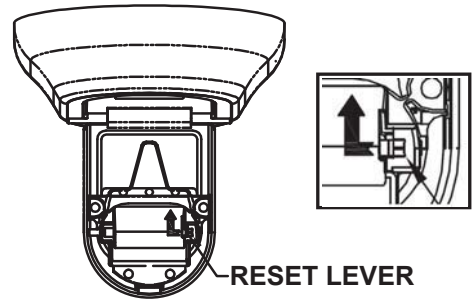



To Fit onto a wall

Tools Required:

Pencil or marker, Phillips head screwdriver. Level, drill and drill bit.

For masonry, anchors and a hammer are recommended.

- Open the compartment door.
- Position the lock on the desired surface.
- Use level to check the lock is vertical.
- Using the product as a template, mark the position of the screws on the surface using pencil or marker.
- Remove the product.
- Using an appropriate size drill bit.
- Insert anchors using hammer if required.
- Position lock.
- Insert and tighten screws. Close the compartment door and hold closed. Scramble the combination dials to lock the door and conceal the combination.
- Close the cover.

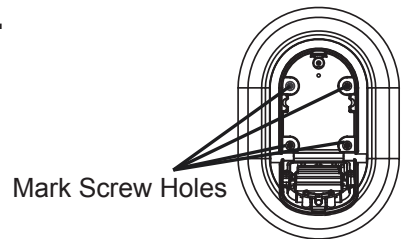

Remember:

The compartment door will remain open until you scramble the dials.

Keep the cover closed to increase weather resistance and to conceal the dials from view.

Record your combination. Store it in a safe place
— — — —