RYOBI® FLOOR HINGES INSTALLATION GUIDE

42099

OPENING SYSTEM OF DOOR	MODEL NUMBER		FITTING SIZE AND WEIGHT	
			WIDTH X HEIGHT (mm)	DOOR WEIGHT (kg)
CENTER HUNG PAIR DOORS OPENED OF IN DOUBLE ACTION	201K	NON -HOLD	900X2100	80
	S201K	90° HOLD		
MAXIMAM OPENING ANGLE 113° HOLDOPEN ANGLE 90°	202K	NON -HOLD	950X2100	130
	S202K	90° HOLD		

Notes: Dimension is indicated by m/m unit

Top pivot(upper frame side)

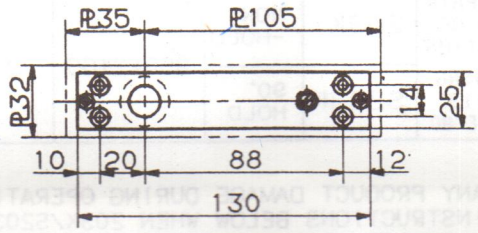

Top pivot(door side)

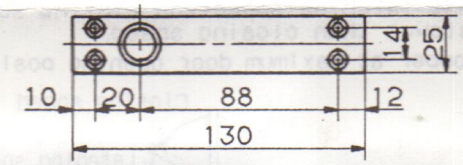

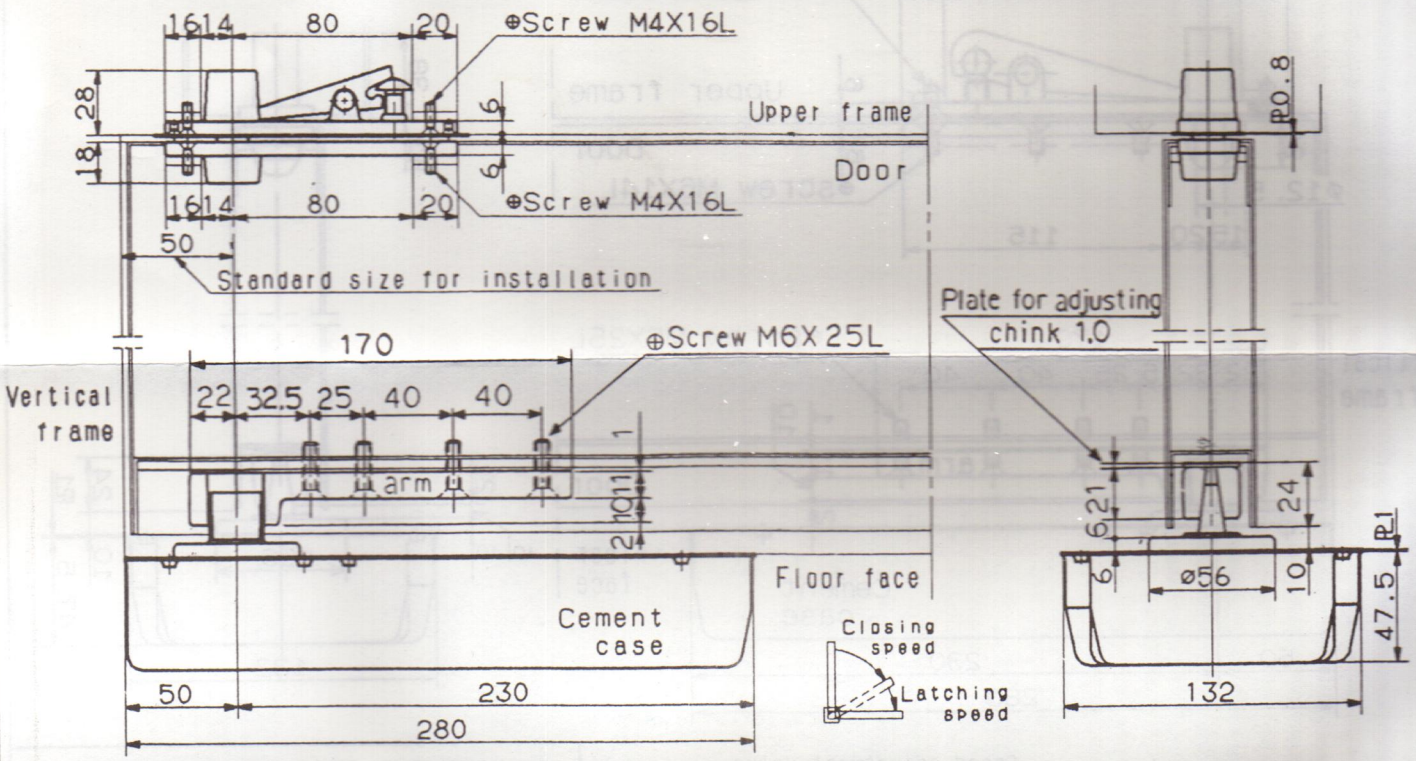

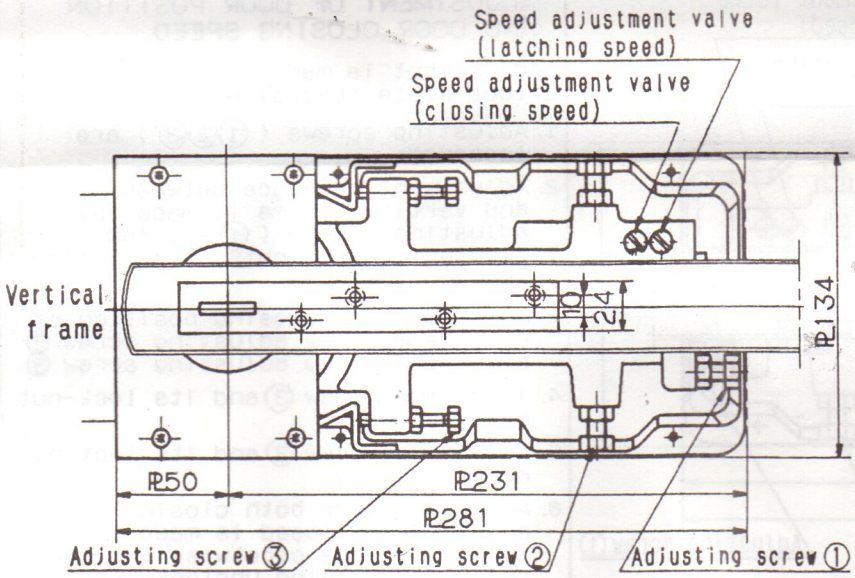

ADJUSTMENT OF DOOR POSITION AND DOOR CLOSING SPEED.

Adjustment is made by taking off floor plate (backside)

1. Adjusting screws (①②③) are loosened.
2. Adjustment of space between door and vertical frame is made by adjusting screws (①③) and tightening lock-nuts of adjusting screws(①③).
3. For further adjustment, after loosening adjusting screw ③ and its lock-nut, adjustment is made by adjusting screw ② and tightening adjusting screw ③ and its lock-nut.
4. Adjusting screw ② and its lock-nut are tightened.
5. Adjustment for both closing speed and latching speed is made by turning valves clockwise for slower speed and turning unclockwise for faster speed.